Overview

■ **UL 4600 standard for AV safety cases**
- Fully autonomous vehicles
- Issued April 2020
- How to contribute to the next version

https://on.gei.co/2r2rjzg

■ **Key 4600 ideas:**
- System-level safety case provides direction
- Vehicle as well as infrastructure and lifecycle processes all matter
- Safety metrics used for feedback loops
- Third party component interface protects proprietary info
- 4600 helps you know that you've done enough work on safety

2

Goal Based Approach

- **Traditional safety standards are prescriptive**
  - *"Here is how to do safety" (process, work products)*
    - ISO 26262, ISO/PAS 21448, IEC 61508, MIL-STD 882, etc.

- **UL 4600 is goal based**
  - *"Here is what a safety case should address"*
    - <u>Do NOT</u> prescribe any particular engineering approach
      - » Use other safety standards within the safety case context
  - Standard for how to assess a safety case
    - Minimum coverage requirement (what goes in the safety case?)
    - Properties of a well-formed safety case
    - Objective assessment criteria

3

Example 4600 Clause

EDGE CASE RESEARCH

12.3.1 V&V shall provide acceptable coverage of safety related faults associated with the design phase.

12.3.1.1 MANDATORY:

a) Systematic design defects

b) Design consideration of faults, corruption, data loss, and integrity loss in sensor data

c) Requirement gaps/omissions and requirement defects

d) Response to violation of requirement assumptions

EXAMPLE: Response to exceptional operational environment

e) Identification and description of the intended ODD

f) Acceptable mitigation of aspects of the defined fault model for each component and other aspect of the item

12.3.1.2 REQUIRED:

a) Maintenance procedure definitions

NOTE: While maintenance occurs during the lifecycle, the definition of procedures needs to correspond to design requirements and assumptions made in design regarding maintenance.

b) Operational procedure definitions (including startup and shutdown) and operational modes

c) Faults, corruption, data loss, and integrity loss in data from external sources

d) Faults and failures associated with exceptional conditions that impair risk reduction functionality

e) Hardware and software errata and other third-party component design defects

f) Other faults in safety related functions, component designs, and other designed properties

12.3.1.3 HIGHLY RECOMMENDED – N/A

12.3.1.4 RECOMMENDED – N/A

12.3.1.5 CONFORMANCE:

Conformance is checked via inspection of design and V&V evidence.

Flexible Approaches

6.4.1   Each identified hazard shall be given a criticality level and assigned an initial risk assuming the absence of mitigation.

6.4.1.1   MANDATORY:

a) Hazard Log records criticality level and initial risk for each hazard

6.4.1.2   REQUIRED:

a) Use of at least one of the following risk evaluation approaches:

1) Risk table
2) Risk equation (weighted probability times severity)
3) Fault Tree Analysis (FTA)
4) Event Tree Analysis (ETA)
5) Preliminary Item Safety Assessment (PSSA)
6) Hazard Analysis and Risk Assessment (HARA)
7) Bowtie diagram
8) System-Theoretic Accident Model and Processes (STAMP)
9) Field engineering feedback
10) Other relevant risk evaluation approaches

b) Use of integrity level and related techniques

EXAMPLES: Integrity level and related techniques from ISO 26262, IEC 61508; development assurance level from DO-178

…

6.4.1.3   HIGHLY RECOMMENDED:

a) Use of integrity levels defined in an accepted domain-relevant functional safety standard

NOTE: It might not be practical to use such integrity levels for all aspects of an autonomous systems, but it is highly recommended to do so to the extent reasonable.

- ■ **Claim – a property of the system**
 - ● "System avoids pedestrians"
- ■ **Argument – why this is true**
  - ● "Detect & maneuver to avoid"
- ■ **Evidence – supports argument**
  - ● Tests, analysis, simulations, …
- ■ **Sub-claims/arguments address complexity**
  - ● "Detects pedestrians" // evidence
  - ● "Maneuvers around detected pedestrians" // evidence
  - ● "Stops if can't maneuver" // evidence

CLAIM

ARGUMENT 1   ARGUMENT 2   …

EVIDENCE 1   Sub-CLAIM 2A   Sub-CLAIM 2B

Sub-ARGUMENT 2A   Sub-ARGUMENT 2B

EVIDENCE 2A   EVIDENCE 2B
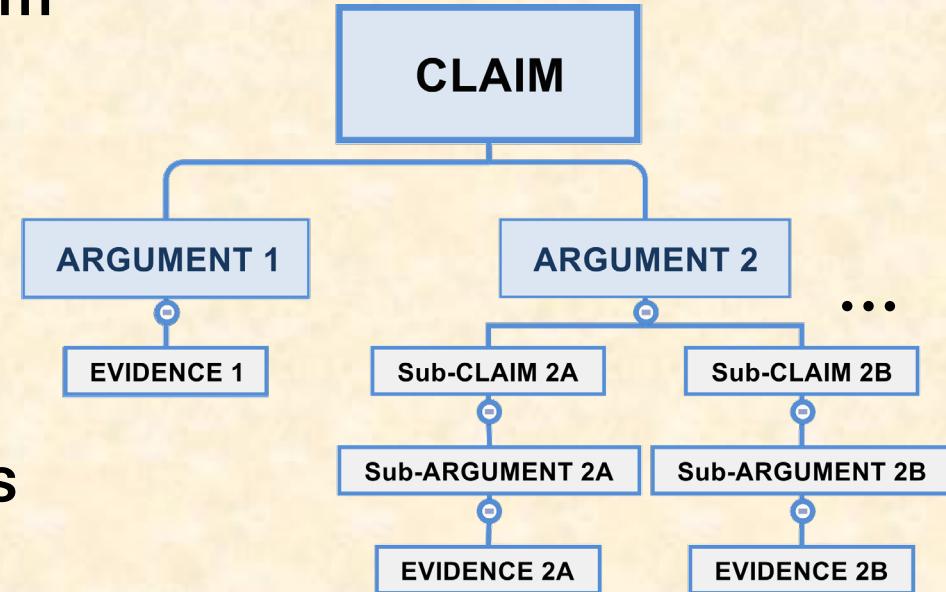
4600 Safety Case Scope

■ **Everything needed to independently assess safety**
- Hazards and mitigation approaches
- Claims traced: arguments to evidence

https://bit.ly/72PhzilT

■ **Scope includes:**
- **Technology:** HW/SW, machine learning, tools, …
- **Lifecycle:** deployment, operation, incidents, maintenance, …
- **Infrastructure:** vehicle, roads, data networks, cloud computing, …
- **Road users:** pedestrians, light mobility, emergency responders, …
- **Environment:** Operational Design Domain (ODD) definition
- … and more …

Example ODD Prompts (§8.2.2)

- **Behavioral rules**
  - EXAMPLES: Traffic laws, vehicle path conflict resolution priority, local customs, justifiable rule breaking for safety

https://bit.ly/2IKIZJ9

- **Compliance strategy of traffic rules and regulations**
  - EXAMPLE: Enumeration of applicable traffic regulations and corresponding ego vehicle behavioral constraints

- **Vulnerable populations including number, density, and types**
  - EXAMPLES: Pedestrians, motorcycles, bikes, scooters, other vulnerable road users, other road users

- **Special road user rules, if applicable**
  - EXAMPLES: Bicycles, motorcycles, lane splitting, interacting with construction vehicles, oversize vehicles, snowplows, sand/salt trucks, emergency response vehicles, street sweepers, horse-drawn vehicles

- **Seasonal effects**
  - EXAMPLES: Foliage changes (e. g., leaves (dis) appearing), sun angle changes, seasonal behavioral patterns (e. g., summer beach traffic), seasonally-linked events (Oktoberfest, regatta crowds, fireworks gatherings, air shows)

- ### Safety Performance Indicator (SPI)
  - Like a KPI, but specific to safety
  - Provides metrics on safety case validity

- ### SPI measures:
  - Behavior metrics for safety-related behaviors
    - E.g.: Acceptable violation rate of standoff to pedestrians
  - Assumption validity within safety case
    - E.g.: Tolerates gaps of up to X meters in lane markings
    - E.g.: Correlated camera and lidar false negative rate
  - Any other metrics that validate safety case
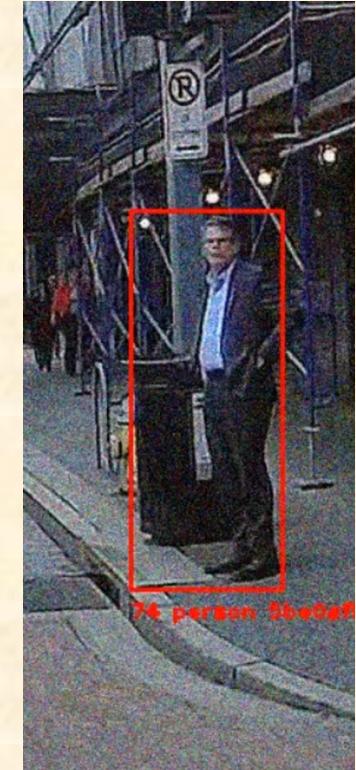
Feedback Loops

■ **Rather than assume perfection…**

   … manage & improve imperfections
- **Feedback data incorporated in safety case**
- **Convert "unknowns" into "knowns" over time**

■ **Feedback loops for continuous improvement**
- **Implementation faults**
- **Design faults**
- **Gaps in simulations, analysis tools, …**
- **Gaps in Operational Design Domain**
- **Gaps in machine learning training data**

10

EDGE CASE RESEARCH

- **Reused or 3rd party system "component"**
  - Similar in spirit to ISO 26262 SEooC
  - Hardware, software, sensor, map data, …

- **EooC has a safety case fragment**
  - Vendor need not expose that safety case
  - Instead, provides an interface containing:
    - Properties & characteristics
    - Assumptions that system must honor
    - Fault model used for assessment
    - 4600 clause coverage (might be partial)
    - Assessment report

11
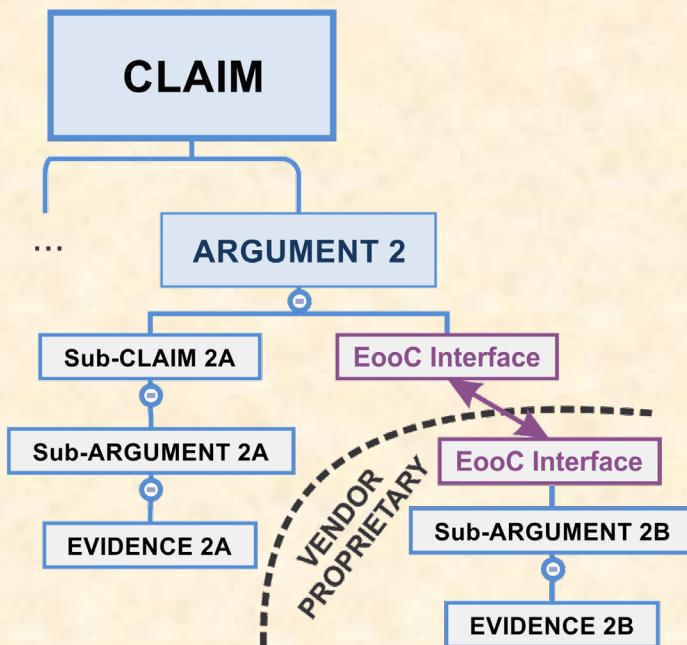
Complementing Other Standards

- ■ **ISO 26262, MIL-STD 882, etc.: potential starting points**
  - ● **Still useful where applicable**

- ■ **ISO/PAS 21448 etc. for scenarios**
  - ● **Design and validation process framework**
  - ● **SaFAD and emerging standards**

https://bit.ly/2VLjNGd

- ■ **4600 has #DidYouThinkofThat? lists**
  - ● **Initial safety case coverage**
  - ● **Learn from experience: yours; others**
  - ● **Objective assessment criteria for safety case**

Other Key Points

- **Self-certification is permitted**
  - Internal assessor permitted; no external "certificate" requirement
- **Only necessary technical mitigations required**
  - "Does not apply to this system" and "Outside ODD" are OK
  - Can use non-technical mitigations
- **Underwriters Laboratories is a non-profit SDO**
  - Voting committee (STP) has diverse representation
  - Continuous Maintenance process provides timely updates
- **Does 4600 conflict with ISO 26262 or ISO/PAS 21448?**
  - No
- **What if you can't afford to buy a copy?**
  - Issued standard is <u>free to browse</u> ("digital view") on-line in its entirety:
    https://www.shopulstandards.com/ProductDetail.aspx?productid=UL4600

UL 4600

STANDARD FOR SAFETY

Evaluation of Autonomous Products

Review of Key Ideas

- **System-level safety case provides direction**
  - Highlights gaps in evidence and arguments
- **Vehicle, infrastructure, and lifecycle processes all matter**
  - If safety case depends upon it, that makes it safety related
- **Metrics combine with feedback loops**
  - Operational feedback will be essential for practical safety
- **Third party component interface to protect proprietary info**
  - EooC interface permits separate component assessment
- **4600 helps you know that you've done enough safety work**
  - Robust prompts and pitfalls capture best practice/lessons learned

Next Steps

- **4600 provides:**
  - Guidance on building safety case
  - Robust minimum criteria
  - Emphasis on ability to assess validity

- **You can get involved!**
  - More info on 4600:
    – https://edge-case-research.com/ul4600/
  - Teams already working toward adoption
  - Participate in the 2020 update cycle
    – Stakeholders can submit comments (free)
    – Register with: Deborah.Prince@ul.org
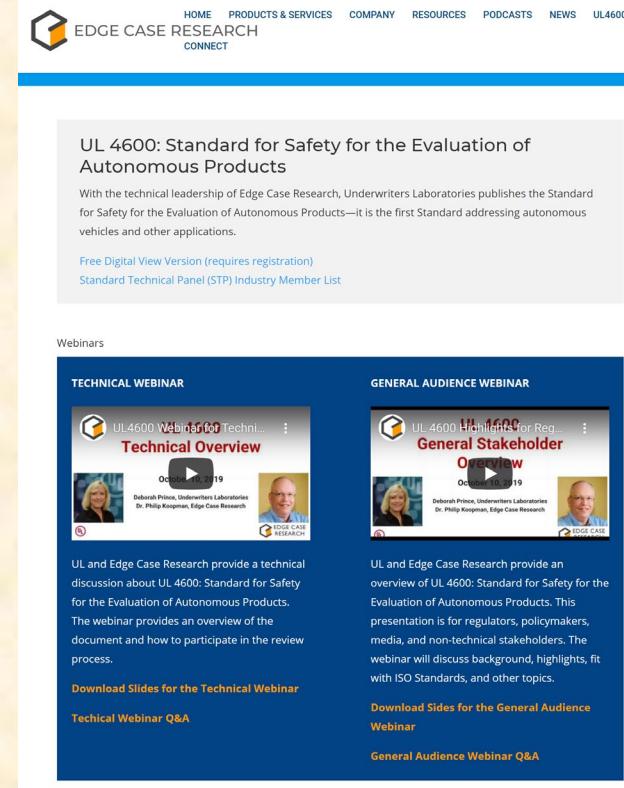
UL 4600: Standard for Safety for the Evaluation of Autonomous Products

15

EDGE CASE RESEARCH
WE DELIVER THE PROMISE OF AUTONOMY